



Surface mounted slot ventilator

Specific Benefits

- Unique occupant controllable tilting T-bar
- Deflects air up or down, or both
- Rounded integral shape
- For use over 16mm slot
- Use with external C16 Canopy (or a pair of GN, GW or PG16 grilles)
- 4000mm² version
- Based on successful Trimvent principle
- Sculpted finger recess
- Matching screw covers
- Patented and registered design
- Available in vent and canopy pre packs
- Remote control vent available
- Sleeve for hollow profiles available

Manufactured From

S16 - PBTP (UV stable) & POM, C16 - PVCu

Recommended Screws

S16 - No.7 or No.8 Countersunk Head

C16 - No.6 Pan or Round Head

Airflow

2 Pa = 6.1m³/hr @ STP

5 Pa = 14.1m³/hr @ STP

10 Pa = 23.9m³/hr @ STP

Acoustic Properties

Details on request

Specifiers Text

Go to www.titon.com/spectext or available on request

Standards

Trimvent Select range tested in accordance with BS 6375 Part 1 - 1989 "Performance of windows - classification for weathertightness"


Full test results available on request

Details (screw fix)

Product	Code	L	W	P Closed-Open	Slot Size
S16 4000	TS1164050	366	21	16-27	151 + 10 + 151 x 16
S16 4000 Remote Control	TS6164050	366	21	32.5	
C16 4000	TS2164020	364	21.5	24	



Trimvent Select S16 ventilator

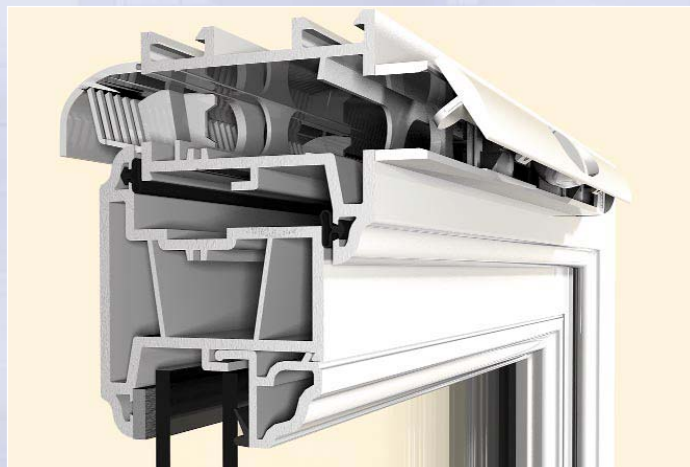

Overhead section

